


18 SERIES



- Available in cast iron
- Models are available with maximum flows from 400 to over 1000 litres per minute
- Maximum pressures from 35 to more than 50 metres of head
- The 184 is now available with a 3.7kW single phase motor for high pressure and flow
- Award winning Hi-Flo impeller means high pressure, high flow, great efficiency and lower operating cost
- Cast Iron casing for corrosion resistance
- Close coupled high efficiency TEFC motor makes it resistant to water ingress and vermin proof
- Inbuilt thermal overload protects the motor from overheating

Applications:

- High flow water transfer, tank filling and irrigation.

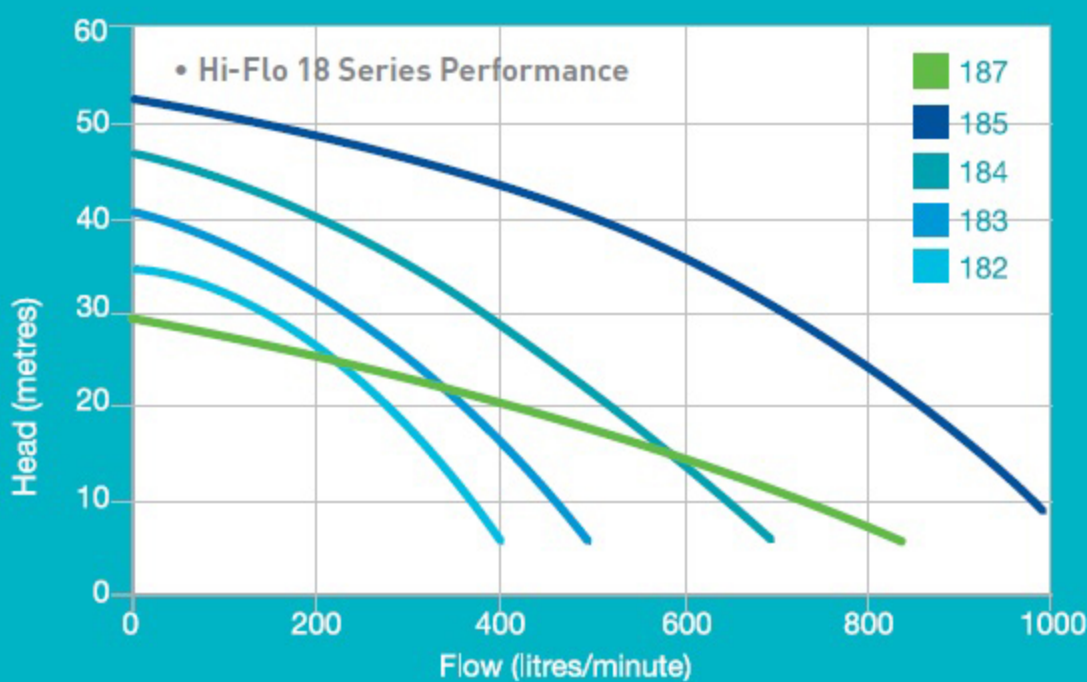

MODEL	Watts (P2)	Voltage	Current (Amps)
HI-FLO 182	1500	230	8.9
HI-FLO 182	1500	415	3.9
HI-FLO 183	2400	230 / 460	14 / 7
HI-FLO 183	2400	415	5.5
HI-FLO 184	3800	230 / 460	20.6 / 10.3
HI-FLO 184	3800	415	7.5
HI-FLO 185	6000	415	12.8
HI-FLO 187	2400	230 / 460	14 / 7
HI-FLO 187	2400	415	5.3

Suction & Discharge 2" female BSP