




- The VF150 is a single phase drainage pump with cast iron construction making it durable and providing a longer life cycle
- Contains a vortex impeller capable of handling soft solids up to 15mm
- Optimum performance reaches 80 litres per minute at 4 metres head
- Automatic float switch operation protects pump against dry running
- Lip seal and dual mechanical seal for improved service life

Applications:

- Septic effluent disposal, water transfer, grey water and sump pumping liquid including grey water (of neutral pH with soft solids up to 15mm at a 10% content or fine solids at 1% concentration).

• VF150 Performance

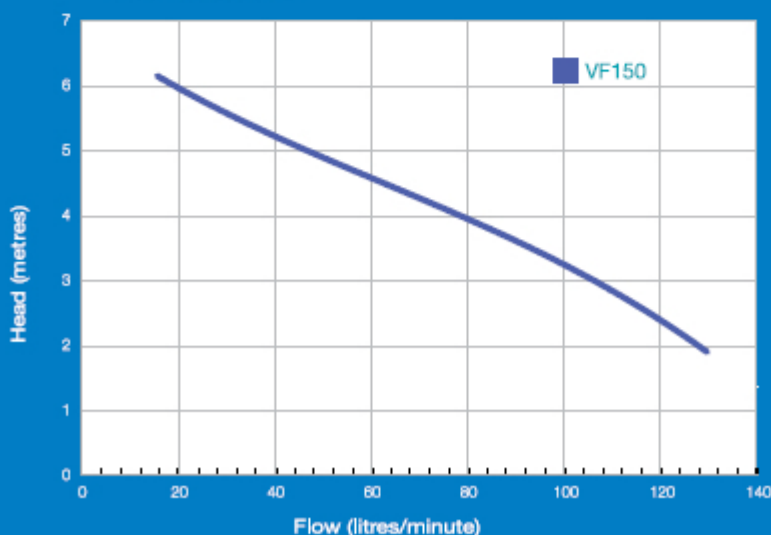

MODEL	Watts (P2)	Nominal Current (Amps)	Full Load Current (Amps)
VF150	180	1.4	2.0