

# Triton® II

## Fiberglass Sand Filter



## The #1 sand filter in the world

Triton® II is the result of over 40 years of product evolution and refinement. It has set the industry standard for effectiveness, efficiency, long runs between service, and providing years of dependable, low maintenance operation.

Triton II features a special internal design that keeps the sand bed level, ensuring even water flow, and resulting in the most efficient filtration possible

- Time-proven internal design ensures that all water receives maximum filtration for crystal clear results.
- GlasLok™ process creates a one-piece, fiberglass reinforced tank with a UV-resistant coating for years of dependable, corrosion-resistant service.
- Flow system design controls filtration quality and ensures maximum run times between backwashing to save you time.




# Triton® II

## Fiberglass Sand Filter

Easy access, heavy-duty closure with built-in pressure relief valve makes inspection and maintenance fast, safe, and easy

Threaded bulkhead connectors for easy installation and service

GlasLok™ process creates a one-piece, fiberglass reinforced tank with UV-resistant surface finish for years of unequalled strength and durability

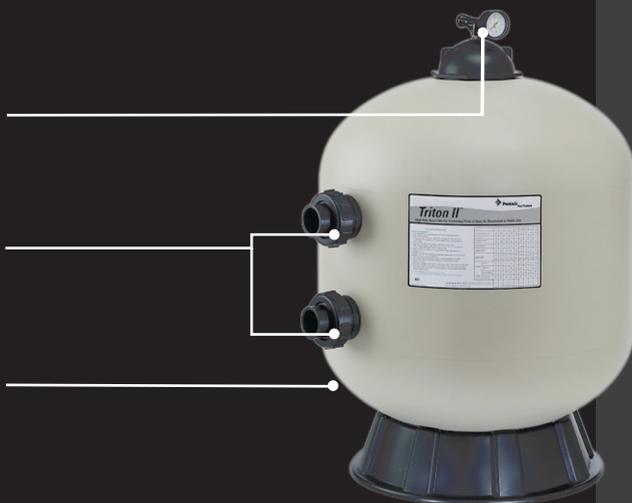

Model Number	Filter Area Sq. Mt.	Vertical Clearance	Filter Diameter	Required Sand† (kgs)	Flow Rate LPM		Turnover Capacity-Res. (Litres)		
					Res.	Com.	8hrs.	10hrs.	12hrs.
TR 40	0.178	826mm	483mm	80	144	144	69,045	86,307	103,568
TR 50	0.228	934mm	533mm	103	186	186	89,032	111,291	133,549
TR 60	0.291	953mm	609mm	148	239	239	114,470	143,088	171,706
TR 100	0.456	1061mm	762mm	273	371	281	178,065	222,582	267,098
TR 140	0.655	1200mm	914mm	420	534	402	256,196	320,245	384,295

† Use standard 16/30 silica sand.  
 Required clearance to remove the closure.  
 \*\* Maximum flow rate. Flow rate is based on 287 lbs per sq.mt. of filter area. Actual system flow will depend on plumbing size and other system components.

## The best reputation in the industry for all the right reasons

Besides its superior filtration performance, Triton® II delivers a level of dependability and ease of operation and maintenance for a track record that's unsurpassed. Every design detail has been refined to make Triton II the industry standard. Additional features include :

- Combination sand and water drain speeds servicing and winterizing.
- All internal parts are threaded for ease of maintenance.
- Swing-away water diffuser allows instant access to sand and all internal parts.
- Ten-year limited warranty. See warranty for details.



### AVAILABLE FROM:

#### Head Office

Pentair AU/NZ: 1-21 Monash Drive,  
Dandenong South, Vic 3175

#### Australia

National Customer Service: Phone: 1300 137 344  
 Fax: 1800 006 688

National Dealer Locator: Phone: 1800 664 266

Email: au.sales@pentair.com  
 Web: www.pentair.com.au

#### New Zealand

National Customer Service: Phone: 0800 654 112  
 Fax: 0800 806 642

National Dealer Locator: Phone: 0800 664 269

Email: nz.sales@pentair.com  
 Web: www.pentair.co.nz

#### International Australia/New Zealand

Phone: +61 3 9709 5800  
 Fax: +61 3 9709 5888

Display, publication, modification or distribution is strictly prohibited without the prior written permission of Pentair Water Pty Ltd.

**Disclaimer:** Every endeavour has been made to publish the correct details in this publication. No responsibility will be taken for errors, omissions or changes in product specifications. Pentair reserves the right to change specifications.

pumps / filters / heaters / heat pumps / automation / lighting / cleaners / sanitizers / water features / maintenance products